


MINI PLUS

2 YEARS*
WARRANTY

EN Small in its dimensions, this model is certified for 51dB by the IFT Rosenheim. It can be equipped with a range of different plungers and its mechanism can be pulled out from both hinge and lock sides (CCE patent). This product can be installed also on pivoting doors in combination with Actuator Pivot accessory.

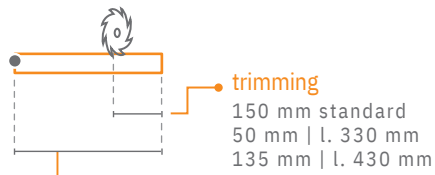

lengths

330 430 530 630 730 830 930 1030 1130
1230 1330 1430 1530 1630 1730 1830 mm

certification



application





TIMBER
DOOR




SECURITY
DOOR


plunger type

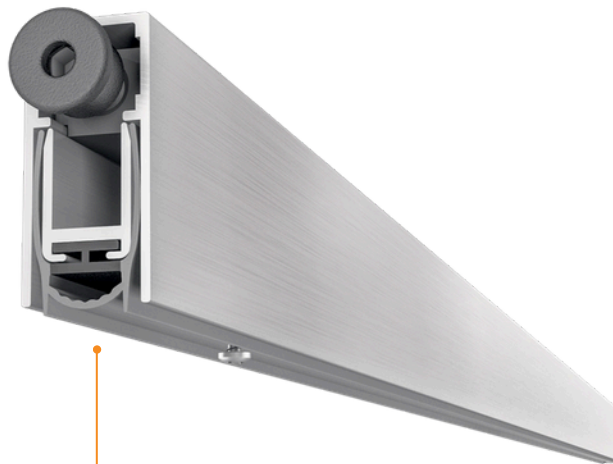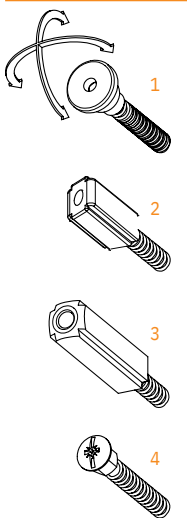

size 13x28 mm

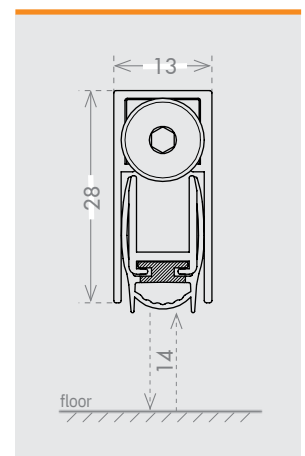


seals




THERM

51 dB Rw
IFT Cert. 16731287/Z5e


fixing type




3F



closing plug included



optional

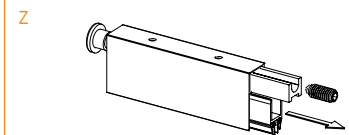

ACTUATOR PIVOT cod. ACAPIV p. 153